

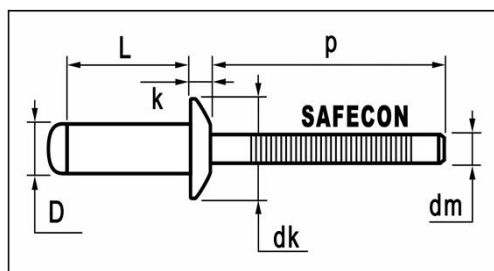


# Riv-link standard blind rivets








	MATERIALS	FINISH
	aluminium alloy [AlMg 5,0]	polished
	stainless steel A2	polished



## AlMg5,0 / stainless steel A2 Dome Head

dimensions in mm

D	L	grip range min. ~ max.	article number	dk	k	dm ref.	p min.	tensile [ N ]	shear [ N ]
3,0 [+0,08/-0,10]  3,1mm	6,0	1,5 ~ 3,5	HBKPS-30060	6,5 [+0/-0,7]	0,8 [+/-0,20]	1,95	27	810	620
	8,0	3,5 ~ 5,5	HBKPS-30080						
	10,0	5,5 ~ 7,5	HBKPS-30100						
	12,0	7,5 ~ 9,5	HBKPS-30120						
3,2 [+0,08/-0,10]  3,3mm	6,0	1,5 ~ 3,0	HBKPS-32060	6,5 [+0/-0,7]	0,8 [+/-0,20]	1,95	27	980	760
	8,0	3,0 ~ 5,0	HBKPS-32080						
	10,0	5,0 ~ 7,0	HBKPS-32100						
	12,0	7,0 ~ 9,0	HBKPS-32120						
4,0 [+0,08/-0,15]  4,1mm	6,0	1,0 ~ 2,0	HBKPS-40060	8,0 [+0/-1,0]	1,0 [+/-0,30]	2,10	27	1.600	1.200
	8,0	2,0 ~ 4,0	HBKPS-40080						
	10,0	4,0 ~ 6,0	HBKPS-40100						
	12,0	6,0 ~ 8,0	HBKPS-40120						
4,8 [+0,08/-0,15]  4,9	8,0	2,0 ~ 3,5	HBKPS-48080	9,5 [+0/-1,0]	1,1 [+/-0,30]	2,70	27	2.230	1.690
	10,0	3,5 ~ 5,5	HBKPS-48100						
	12,0	5,5 ~ 7,5	HBKPS-48120						
	14,0	7,5 ~ 9,5	HBKPS-48140						
	16,0	9,0 ~ 11,0	HBKPS-48160						
	18,0	11,0 ~ 13,0	HBKPS-48180						
5,0 [+0,08/-0,15]  5,1mm	8,0	2,0 ~ 3,5	HBKPS-50080	9,5 [+0/-1,0]	1,1 [+/-0,30]	2,70	27	2.500	2.000
	10,0	3,5 ~ 5,5	HBKPS-50100						
	12,0	5,5 ~ 7,5	HBKPS-50120						
	14,0	7,5 ~ 9,5	HBKPS-50140						
	16,0	9,0 ~ 11,0	HBKPS-50160						
	18,0	11,0 ~ 13,0	HBKPS-50180						
20,0	13,0 ~ 15,0	HBKPS-50200							