



Riv-link standard blind rivets



	MATERIALS	FINISH
	aluminium alloy [AlMg 5,0]	polished
	stainless steel A2	polished

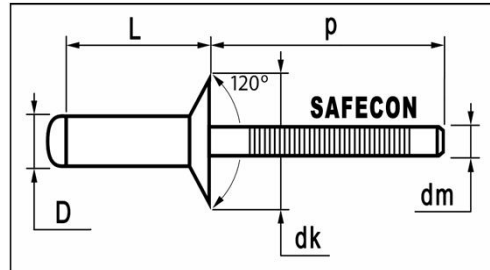

AlMg5,0 / stainless steel A2 Countersunk Head

dimensions in mm

D	L	grip range	article number	dk	k	dm	p	tensile	shear
	+0,9/-0	min. ~ max.				ref.	min.	[N]	[N]
3,2	6,0	~ 3,0	HBKPS2-32060						
[+0,08/-0,10]	8,0	3,0 ~ 5,0	HBKPS2-32080	6,0	1,0	1,95	27	980	760
	10,0	5,0 ~ 7,0	HBKPS2-32100	[+0/-0,4]					
3,3mm	12,0	7,0 ~ 9,0	HBKPS2-32120						
4,0	6,0	~ 2,0	HBKPS2-40060						
[+0,08/-0,15]	8,0	2,0 ~ 4,0	HBKPS2-40080	7,5	1,2	2,10	27	1.600	1.200
	10,0	4,0 ~ 6,0	HBKPS2-40100	[+0/-0,5]					
4,1mm	12,0	6,0 ~ 8,0	HBKPS2-40120						
4,8	8,0	~ 3,5	HBKPS2-48080						
[+0,08/-0,15]	10,0	3,5 ~ 5,5	HBKPS2-48100						
	12,0	5,5 ~ 7,5	HBKPS2-48120						
4,9	14,0	7,5 ~ 9,5	HBKPS2-48140	9,0	1,5	2,70	27	2.230	1.690
	16,0	9,0 ~ 11,0	HBKPS2-48160	[+0/-0,5]					
	18,0	11,0 ~ 13,0	HBKPS2-48180						
	20,0	13,0 ~ 15,0	HBKPS2-48200						