



# Riv-link standard blind rivets



	MATERIALS	FINISH
	stainless steel A2	polished
	stainless steel A2	polished

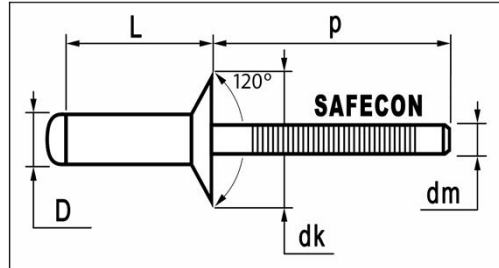

stainless steel A2 / stainless steel A2 Countersunk Head

dimensions in mm

D	L	grip range	article number	dk	dm	p	tensile	shear
	+0,9/-0	min. ~ max.			ref.	min.	[ N ]	[ N ]
<b>3,2</b>	6,0	~ 3,0	<b>QBKPS2-32060</b>					
[+0,08/-0,10]	8,0	3,0 ~ 5,0	<b>QBKPS2-32080</b>	6,0	2,00	27	2.500	1.900
	10,0	5,0 ~ 7,0	<b>QBKPS2-32100</b>	[+0/-0,4]				
3,3mm	12,0	7,0 ~ 9,0	<b>QBKPS2-32120</b>					
<b>4,0</b>	6,0	~ 2,0	<b>QBKPS2-40060</b>					
[+0,08/-0,15]	8,0	2,0 ~ 4,0	<b>QBKPS2-40080</b>					
	10,0	4,0 ~ 6,0	<b>QBKPS2-40100</b>					
	12,0	6,0 ~ 8,0	<b>QBKPS2-40120</b>	7,5	2,50	27	3.800	3.100
	14,0	8,0 ~ 10,0	<b>QBKPS2-40140</b>	[+0/-0,5]				
4,1mm	16,0	10,0 ~ 12,0	<b>QBKPS2-40160</b>					
	18,0	12,0 ~ 14,0	<b>QBKPS2-40180</b>					
<b>4,8</b>	8,0	~ 3,5	<b>QBKPS2-48080</b>					
[+0,08/-0,15]	10,0	3,5 ~ 5,5	<b>QBKPS2-48100</b>					
	12,0	5,5 ~ 7,5	<b>QBKPS2-48120</b>					
	14,0	7,5 ~ 9,5	<b>QBKPS2-48140</b>	9,0	2,90	27	6.000	4.500
	16,0	9,0 ~ 11,0	<b>QBKPS2-48160</b>	[+0/-0,5]				
4,9mm	18,0	11,0 ~ 13,0	<b>QBKPS2-48180</b>					
	20,0	13,0 ~ 15,0	<b>QBKPS2-48200</b>					