



Riv-link standard blind rivets







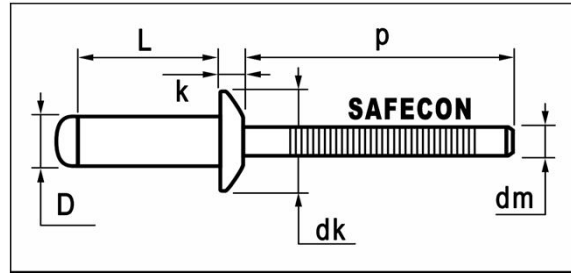


MATERIALS	FINISH
stainless steel A2	polished
stainless steel A2	polished



stainless steel A2 / stainless steel A2 Dome Head

dimensions in mm

D	L	grip range	article number	dk	k	dm	p	tensile	shear
	+0,9/-0	min. ~ max.				ref.	min.	[N]	[N]
3,0	6,0	1,5 ~ 3,5	QBKPS-30060						
[+0,08/-0,10]	8,0	3,5 ~ 5,5	QBKPS-30080	6,5	0,8	1,90	27	2.200	1.800
	10,0	5,5 ~ 7,5	QBKPS-30100	[+0/-0,7]	[+/-0,20]				
3,1mm	12,0	7,5 ~ 9,5	QBKPS-30120						
3,2	6,0	1,5 ~ 3,0	QBKPS-32060						
[+0,08/-0,10]	8,0	3,0 ~ 5,0	QBKPS-32080						
	10,0	5,0 ~ 7,0	QBKPS-32100	6,5	0,8	2,00	27	2.500	1.900
3,3mm	12,0	7,0 ~ 9,0	QBKPS-32120	[+0/-0,7]	[+/-0,20]				
	14,0	9,0 ~ 11,0	QBKPS-32140						
	16,0	11,0 ~ 12,5	QBKPS-32160						
4,0	6,0	1,0 ~ 2,0	QBKPS-40060						
[+0,08/-0,15]	8,0	2,0 ~ 4,0	QBKPS-40080						
	10,0	4,0 ~ 6,0	QBKPS-40100						
4,1mm	12,0	6,0 ~ 8,0	QBKPS-40120	8,0	1,0	2,50	27	3.800	3.100
	14,0	8,0 ~ 10,0	QBKPS-40140	[+0/-1,0]	[+/-0,30]				
	16,0	10,0 ~ 12,0	QBKPS-40160						
	18,0	12,0 ~ 14,0	QBKPS-40180						
	20,0	14,0 ~ 15,5	QBKPS-40200						
4,8	8,0	2,0 ~ 4,0	QBKPS-48080						
[+0,08/-0,15]	10,0	4,0 ~ 6,0	QBKPS-48100						
	12,0	6,0 ~ 8,0	QBKPS-48120						
4,9mm	14,0	8,0 ~ 9,5	QBKPS-48140	9,5	1,1	2,90	27	6.000	4.500
	16,0	9,5 ~ 11,0	QBKPS-48160	[+0/-1,0]	[+/-0,30]				
	18,0	11,0 ~ 13,0	QBKPS-48180						
	20,0	13,0 ~ 15,0	QBKPS-48200						
	22,0	15,0 ~ 17,0	QBKPS-48220						
	25,0	17,0 ~ 20,0	QBKPS-48250						
5,0	8,0	2,0 ~ 3,5	QBKPS-50080						
[+0,08/-0,15]	10,0	3,5 ~ 5,5	QBKPS-50100						
	12,0	5,5 ~ 7,5	QBKPS-50120	9,5	1,1	2,90	27	6.500	5.000
5,1mm	14,0	7,5 ~ 9,5	QBKPS-50140	[+0/-1,0]	[+/-0,30]				
	16,0	9,0 ~ 11,0	QBKPS-50160						
6,0	12,0	4,5 ~ 6,0	QBKPS-60120						
[+0,08/-0,15]	14,0	6,0 ~ 8,5	QBKPS-60140						
	16,0	8,5 ~ 10,5	QBKPS-60160	12,0	1,5	3,60	31	8.830	6.500
6,1mm	18,0	10,5 ~ 12,0	QBKPS-60180	[+/-0,35]	[+/-0,40]				
	22,0	12,0 ~ 16,0	QBKPS-60220						
6,4	12,0	3,5 ~ 5,5	QBKPS-64120						
[+0,08/-0,15]	15,0	5,5 ~ 8,5	QBKPS-64150						
	18,0	8,5 ~ 11,5	QBKPS-64180	12,7	2,1	3,85	31	8.850	6.500
6,5mm	22,0	11,5 ~ 15,5	QBKPS-64220	[+/-0,35]	[+/-0,40]				
	25,0	15,5 ~ 18,0	QBKPS-64250						