


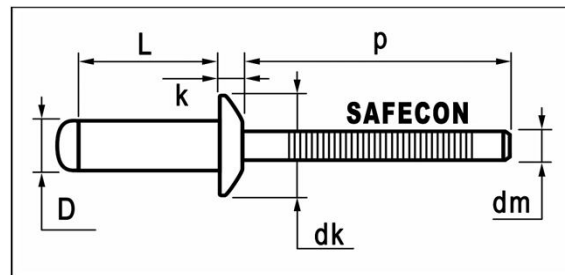


Riv-link standard blind rivets







	MATERIALS	FINISH
	stainless steel A2	polished
	stainless steel A2	polished



stainless steel A4 / stainless steel A4 Dome Head

dimensions in mm

D	L	grip range	article number	dk	k	dm	p	tensile	shear
	+0,9/-0	min. ~ max.				ref.	min.	[N]	[N]
3,0	6,0	1,5 ~ 3,5	QBKWPS-30060						
[+0,08/-0,10]	8,0	3,5 ~ 5,5	QBKWPS-30080	6,5	0,8	1,90	27	2.200	1.800
	10,0	5,5 ~ 7,5	QBKWPS-30100	[+0/-0,7]	[+/-0,20]				
3,1mm									
3,2	6,0	1,5 ~ 3,0	QBKWPS-32060						
[+0,08/-0,10]	8,0	3,0 ~ 5,0	QBKWPS-32080	6,5	0,8	2,00	27	2.500	1.900
	10,0	5,0 ~ 7,0	QBKWPS-32100	[+0/-0,7]	[+/-0,20]				
3,3mm	12,0	7,0 ~ 9,0	QBKWPS-32120						
4,0	6,0	1,0 ~ 2,0	QBKWPS-40060						
[+0,08/-0,15]	8,0	2,0 ~ 4,0	QBKWPS-40080						
	10,0	4,0 ~ 6,0	QBKWPS-40100	8,0	1,0	2,50	27	3.800	3.100
	12,0	6,0 ~ 8,0	QBKWPS-40120	[+0/-1,0]	[+/-0,30]				
4,1mm	14,0	8,0 ~ 10,0	QBKWPS-40140						
	16,0	10,0 ~ 12,0	QBKWPS-40160						
4,8	8,0	2,0 ~ 3,5	QBKWPS-48080						
[+0,08/-0,15]	10,0	3,5 ~ 5,5	QBKWPS-48100						
	12,0	5,5 ~ 7,5	QBKWPS-48120						
4,9mm	14,0	7,5 ~ 9,5	QBKWPS-48140	9,5	1,1	2,90	27	6.000	4.500
	16,0	9,0 ~ 11,0	QBKWPS-48160	[+0/-1,0]	[+/-0,30]				
	18,0	11,0 ~ 13,0	QBKWPS-48180						
	20,0	13,0 ~ 15,0	QBKWPS-48200						
	22,0	15,0 ~ 17,0	QBKWPS-48220						