




Seal-link blind rivets






	MATERIALS	FINISH
	aluminium alloy [AlMg 5,0]	polished
	stainless steel A2	polished

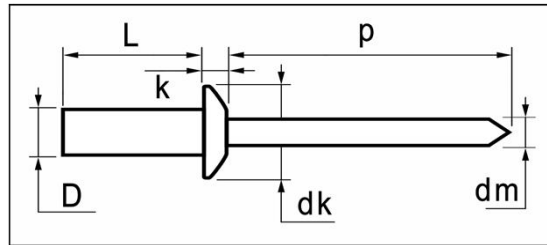

AlMg.5,0 / stainless steel A2

Dome Head

dimensions in mm

D	L	grip range	article number	dk	k	dm	p	tensile	shear
	+0,9/-0	min. ~ max.			max.	ref.	min.	[N]	[N]
3,2	6,5	0,5 ~ 2,0	HBF-32065	6,0 [+/-0,24]	1,40	1,70	27	1.250	1.070
[+/-0,08]	8,0	2,0 ~ 3,5	HBF-32080						
	9,5	3,5 ~ 5,0	HBF-32095						
3,3mm	10,7	5,0 ~ 6,5	HBF-32107						
	12,5	6,5 ~ 8,0	HBF-32125						
4,0	8,0	1,0 ~ 3,5	HBF-40080	8,0 [+/-0,29]	1,70	2,20	27	2.240	1.700
[+/-0,08]	9,5	3,5 ~ 4,5	HBF-40095						
	11,0	4,5 ~ 6,5	HBF-40110						
4,1mm	12,5	6,5 ~ 8,0	HBF-40125						
	15,0	8,0 ~ 10,5	HBF-40150						
4,8	8,0	1,0 ~ 3,0	HBF-48080	9,0 [+/-0,29]	2,00	2,63	27	3.100	2.200
[+/-0,08]	9,5	3,0 ~ 4,5	HBF-48095						
	11,0	4,5 ~ 6,0	HBF-48110						
4,9mm	12,5	6,0 ~ 7,5	HBF-48125						
	14,0	7,5 ~ 9,0	HBF-48140						
	16,0	9,0 ~ 11,0	HBF-48160						
	18,0	11,0 ~ 13,0	HBF-48180						
	21,0	13,0 ~ 16,0	HBF-48210						
	25,0	16,0 ~ 20,0	HBF-48250						