

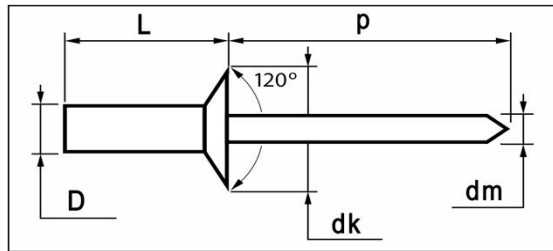


Seal-link blind rivets






	MATERIALS	FINISH
	aluminium alloy [AlMg 5,0]	polished
	stainless steel A2	polished



AlMg.5,0 / stainless steel A2

Countersunk Head

dimensions in mm

D	L	grip range	article number	dk	k	dm	p	tensile	shear
	+0,9/-0	min. ~ max.				ref.	min.	[N]	[N]
3,2	7,5	1,5 ~ 3,5	HBF2-32075						
[+/-0,08]	9,0	3,5 ~ 4,5	HBF2-32090	6,0	1,00	1,70	27	1.250	1.070
	10,5	4,5 ~ 6,5	HBF2-32105	[+0/-0,4]					
3,3mm									
4,0	9,5	2,0 ~ 5,0	HBF2-40095						
[+/-0,08]	11,0	5,0 ~ 6,5	HBF2-40110	7,5	1,20	2,20	27	2.240	1.700
	12,5	6,0 ~ 8,0	HBF2-40125	[+0/-0,5]					
4,1mm									
4,8	9,5	2,5 ~ 4,5	HBF2-48095						
[+/-0,08]	11,0	4,5 ~ 6,0	HBF2-48110						
	12,5	6,0 ~ 7,5	HBF2-48125	9,0	1,30	2,65	27	3.100	2.200
4,9mm	14,0	7,5 ~ 9,0	HBF2-48140	[+0/-0,5]					
	15,5	9,0 ~ 10,5	HBF2-48155						
	17,0	10,5 ~ 12,0	HBF2-48170						
	19,0	12,0 ~ 14,0	HBF2-48190						