



Seal-link blind rivets



	MATERIALS	FINISH
	stainless steel A2	polished
	stainless steel A1	polished

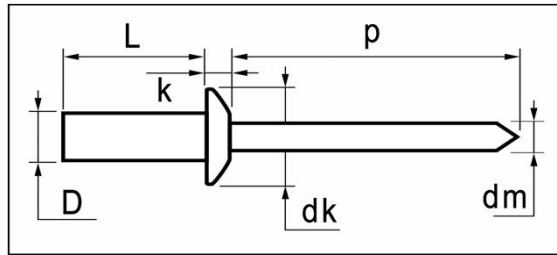

stainless steel A2 / stainless steel A1 Large Head

dimensions in mm

D	L	grip range	article number	dk	k	dm	p	tensile	shear
	+0,9/-0	min. ~ max.				ref.	min.	[N]	[N]
3,2	6,0	0,5 ~ 1,5	QBFSL100-32060						
[+0,08/-0,10]	8,0	1,5 ~ 3,0	QBFSL100-32080	10,0	0,9	1,90	27	2.500	2.000
	9,5	3,0 ~ 5,0	QBFSL100-32095	[+/-0,29]	[+/-0,30]				
3,3mm	12,0	5,0 ~ 7,0	QBFSL100-32120						
4,0	6,0	0,5 ~ 1,5	QBFSL120-40060						
[+0,08/-0,10]	8,0	1,5 ~ 3,0	QBFSL120-40080						
	10,0	3,0 ~ 5,0	QBFSL120-40100	12,0	1,1	2,30	27	4.000	3.000
4,1mm	12,0	5,0 ~ 6,5	QBFSL120-40120	[+/-0,35]	[+/-0,30]				
	15,0	6,5 ~ 10,5	QBFSL120-40150						
4,8	8,0	1,0 ~ 3,0	QBFSL140-48080						
[+0,08/-0,10]	9,5	3,0 ~ 4,5	QBFSL140-48095						
	12,0	4,5 ~ 6,0	QBFSL140-48120	14,0	1,3	2,90	27	5.500	4.500
4,9mm	16,0	6,0 ~ 10,5	QBFSL140-48160	[+/-0,35]	[+/-0,30]				
	20,0	10,5 ~ 14,0	QBFSL140-48200						