

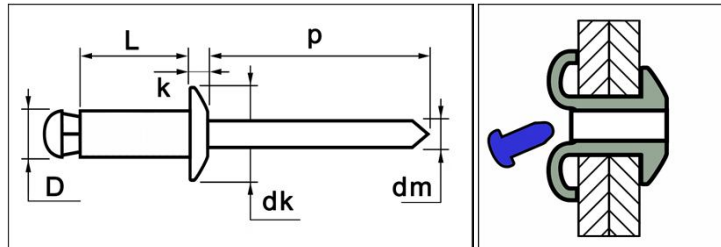


Peel Type blind rivets






	MATERIALS	FINISH
	aluminium alloy [AlMg 5,0]	polished
	carbon steel	zinc plated



AlMg5,0 / steel Dome Head

dimensions in mm

D	L	grip range	article number	dk	k	dm	p	tensile	shear
	+0,9/-0	min. ~ max.				ref.	min.	[N]	[N]
3,4	8,0	~ 1,0	HW-32080						
[+0/-0,15]	10,0	1,0 ~ 3,0	HW-32100						
	12,0	3,0 ~ 5,0	HW-32120	6,0	1,4	1,80	27	750	820
3,5mm-3,7mm	14,0	5,0 ~ 7,0	HW-32140	[+/-0,24]	[+/-0,10]				
	16,0	7,0 ~ 9,0	HW-32160						
	18,0	9,0 ~ 11,0	HW-32180						
4,2	10,0	1,5 ~ 5,0	HW-40100						
[+0/-0,15]	12,0	4,0 ~ 6,5	HW-40120						
	14,0	6,0 ~ 9,0	HW-40140	8,0	1,7	2,20	27	1.140	1.280
4,3mm-4,5mm	16,0	8,0 ~ 11,0	HW-40160	[+/-0,29]	[+/-0,20]				
	18,0	10,0 ~ 13,0	HW-40180						
	20,0	12,0 ~ 15,0	HW-40200						
5,1	10,0	1,5 ~ 4,0	HW-48100						
[+0/-0,15]	12,0	2,0 ~ 6,0	HW-48120						
	14,0	4,0 ~ 8,0	HW-48140						
5,2mm-5,4mm	16,0	6,0 ~ 10,0	HW-48160						
	18,0	8,0 ~ 12,0	HW-48180	9,5	2,0	2,65	27	1.600	1.855
	20,0	10,0 ~ 14,0	HW-48200	[+/-0,29]	[+/-0,20]				
	22,0	12,0 ~ 16,0	HW-48220						
	25,0	16,0 ~ 19,0	HW-48250						
	30,0	19,0 ~ 24,0	HW-48300						